


# 2N® LIFTGATE

2N

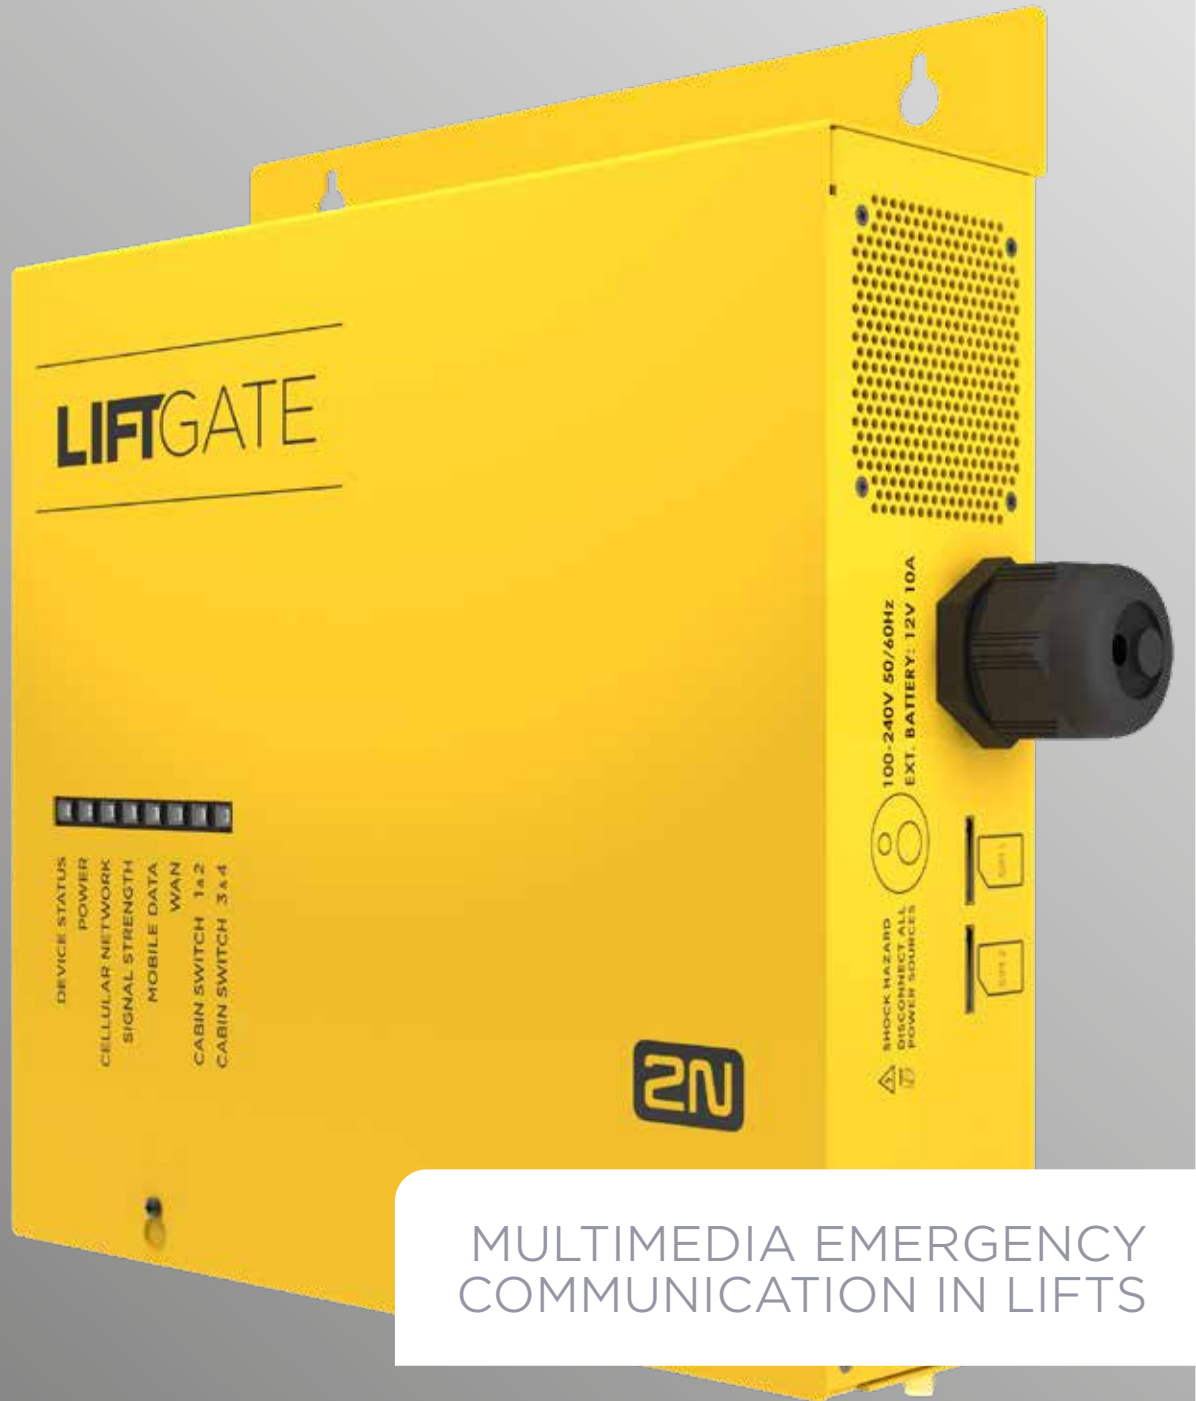

## MULTIMEDIA EMERGENCY COMMUNICATION IN LIFTS

The 2N® LiftGate IoT gateway will transform a regular lift into a modern IP solution for the 21st century. Plus, you needn't worry if there's a UTP cable in the lift. IP connectivity in the lift is secured using 2 wires in the travelling cable. 2N® LiftGate combines the functions of an LTE router, a backup power supply, a converter (2-wire to IP) and a switch all in one unit. Install just 1 product instead of 4 and save time and money.

# FEATURES & BENEFITS

## IP CONNECTIVITY OVER 2-WIRE

Install the 2N® LiftGate in the lift machine room, a 2N® LiftGate Cabin Switch on the roof of the cabin and connect them via 2 wires in the travelling cable.

## ALL IN ONE IOT DEVICE

You no longer need a separate LTE router, switch, converter and backup power supply. 2N® LiftGate will perform all these functions for you. One certified product that saves you time and money.

## UP TO 4 IP DEVICES IN THE CABIN

You can connect an IP communicator, a camera, a display for ads or a reader to the 2N® LiftGate Cabin Switch. There's even a backup 12 V output for emergency lighting.

## CONNECTING THE MACHINE ROOM AND THE CABIN

Connect a lift controller and IP telephone to 2N® LiftGate in the machine room. This meets the requirements of technical standards for shafts of more than 30 m and ensures communication between the machine room and the cabin.

## BACKUP POWER SUPPLY

Ensure emergency communication in the lift even during power cuts. The 2N® LiftGate solution includes UPS to power critical communication equipment and emergency lighting.

## COMMUNICATION VIA SIM AND WAN PORT

You only need one SIM card to make calls, for data communication with the gateway, the controller or access control system. A backup option can be provided in the form of a WAN port or second SIM.

## RELAY OUTPUTS AND INPUTS


Has the mobile network gone down? The 2N® LiftGate switches a relay, informs the controller, which changes the status of the lift to out of service. However, relay outputs and inputs offer many more scenarios.

## MANAGEMENT VIA CLOUD AND SMS

Connect the IoT gateway to the 2N® Elevator Center in cloud to manage and monitor it remotely. Naturally, you can control the gateway and get notifications via SMS.



# CONNECTION DIAGRAM

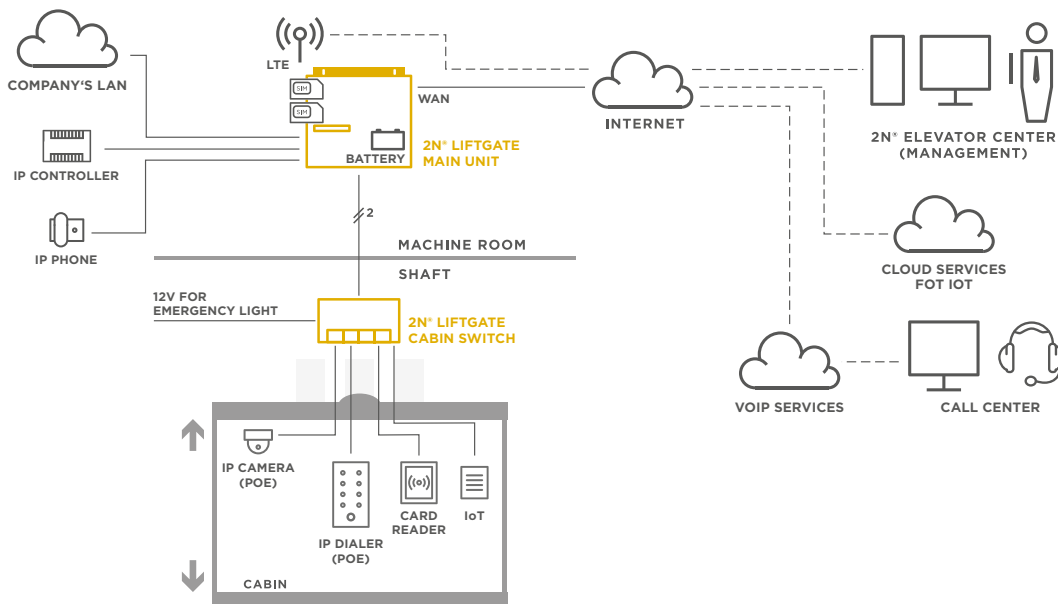

# VARIANTS




**2N° LIFTGATE, 2X CS,  
AKU+, AU PLUG  
5024101AU**



**2N° LIFTGATE, 2X CS,  
AKU+, EU PLUG  
5024101E**



**2N° LIFTGATE, 2X CS,  
AKU+, US PLUG  
5024101US**



**2N° LIFTGATE CABIN SWITCH,  
4X ETH, 12V DC  
502460E**



## CENTRALIZED MANAGEMENT AND MONITORING

The 2N° Elevator Center gives you non-stop control over all installed elevator devices. Manage and monitor your IP communicators, gateways and routers from your office. You don't need any IT skills. A technician will install the device and it will automatically connect to the portal in just a few seconds. 2N° Elevator Center will safely and reliably usher you to the world of smart elevators with modern functions.

# 2N<sup>®</sup> LIFTGATE – MAIN UNIT TECHNICAL PARAMETERS

## TELEPHONE NETWORK

|           |   |
|-----------|---|
| GSM band  | EU (EGSM 900 MHz, GSM 1800 MHz)<br>AU (EGSM 850/900 MHz, GSM 1800/1900 MHz)       |
| UMTS band | EU (850/900/2100 MHz)<br>US (850/1700/1900 MHz)<br>AU (850/900/1900/2100 MHz)     |
| LTE band  | EU (B1, B3, B5, B7, B8, B20)<br>US (B2, B4, B12)<br>AU (B1, B3, B5, B7, B28, B40) |
| SIM cards | 2 slots; (U)SIM, 1.8 / 3.0 V  |

## ANTENNA

|                |                              |
|----------------|------------------------------|
| Number         | Two inputs (one for RX only) |
| Impedance      | 50 Ω                         |
| Connector type | F-SMA                        |

## ETHERNET

|           |   |
|-----------|---|
| Interface | 4x RJ-45, 1 Gbps (1x WAN, 3x LAN)                                 |
| PoE       | 1x PoE 802.3af Class 2 (max 6.49 W) via the LAN3 port             |
| Protocols | IPv4, IGMP, DNS, DHCP, NAT, HTTP, HTTPS, WS, NTP, OPENVPN, SYSLOG |

## INPUTS AND OUTPUTS

|                 |   |
|-----------------|---|
| Inputs          | 2<br>0 - 24 V (low level 0-2 V, high 4-24 V)                                  |
| Outputs         | 2x relay (NO, NC, COM terminal block)<br>max. 30 V / 1 A DC, 125 V / 0.3 A AC |
| Number of lines | 2   |

## POWER SUPPLY

|              |  |
|--------------|--|
| Voltage      | 100 - 230 V AC                                     |
| Frequency    | 50/60 Hz   |
| Input power  | 65 W for 2x Cabin Switch                           |
| Backup power | built-in lead-acid battery, 12 V / 9 Ah (included) |

## MECHANICAL PROPERTIES

|                       |  |
|-----------------------|--|
| Operating temperature | -4°F to +122°F                                 |
| Dimensions            | 10.62 x 9.44 x 3.14 inch                       |
| IP protection         | IP20   |
| Weight                | 10.36 lb with battery, 4.85 lb without battery |

# 2N<sup>®</sup> LIFTGATE – CABIN SWITCH TECHNICAL PARAMETERS

Connection to the main unit: 2 wires

## INTERFACE

|           |   |
|-----------|---|
| Ethernet  | 4x RJ-45 port, 100 Mbps   |
| PoE:      | 2x PoE 802.3af Class 2 (max 6.49 W) via LAN1 and LAN2 ports       |
| Output    | 12 V DC, 100 mA (for emergency lighting)                          |
| Protocols | IPv4, IGMP, DNS, DHCP, NAT, HTTP, HTTPS, WS, NTP, OPENVPN, SYSLOG |

## MECHANICAL PROPERTIES

|                       |                                       |
|-----------------------|---------------------------------------|
| Operating temperature | -4°F to +122°F                        |
| Dimensions            | 5.62 x 3.74 x 1.25 inch               |
| IP protection         | IP30                                  |
| Installation          | Surface mounted on a wall or DIN rail |
| Weight                | 0.44 lb                               |